

Eco Heating System

– Products & Business Plan –

2010.02.03


EHS TFT

Digital Air Solutions Business Team



Installation

Installation Example

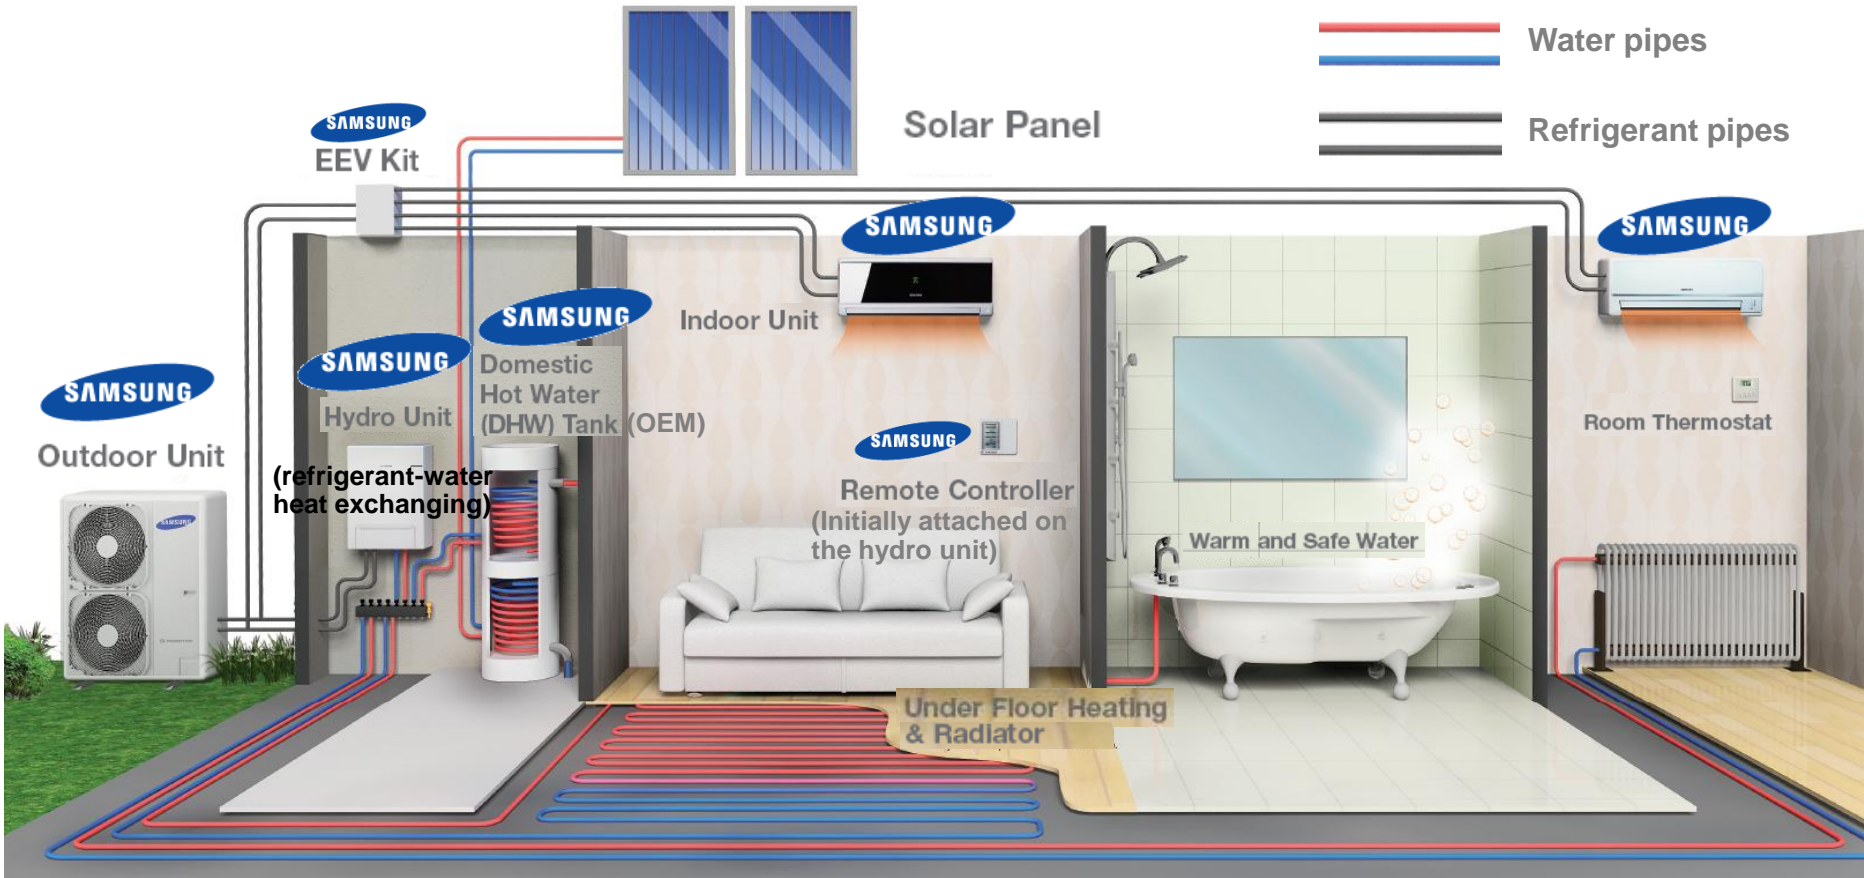


Features

Integrated Heating & Cooling System at a Lower Cost

Time Division Multi (TDM), a smart alternating operation between air-to-water and air-to-air, enables one outdoor unit to operate for both functionalities resulting in lower product cost and space saving.

**Samsung's
New EHS
Technology,
First in Europe!**

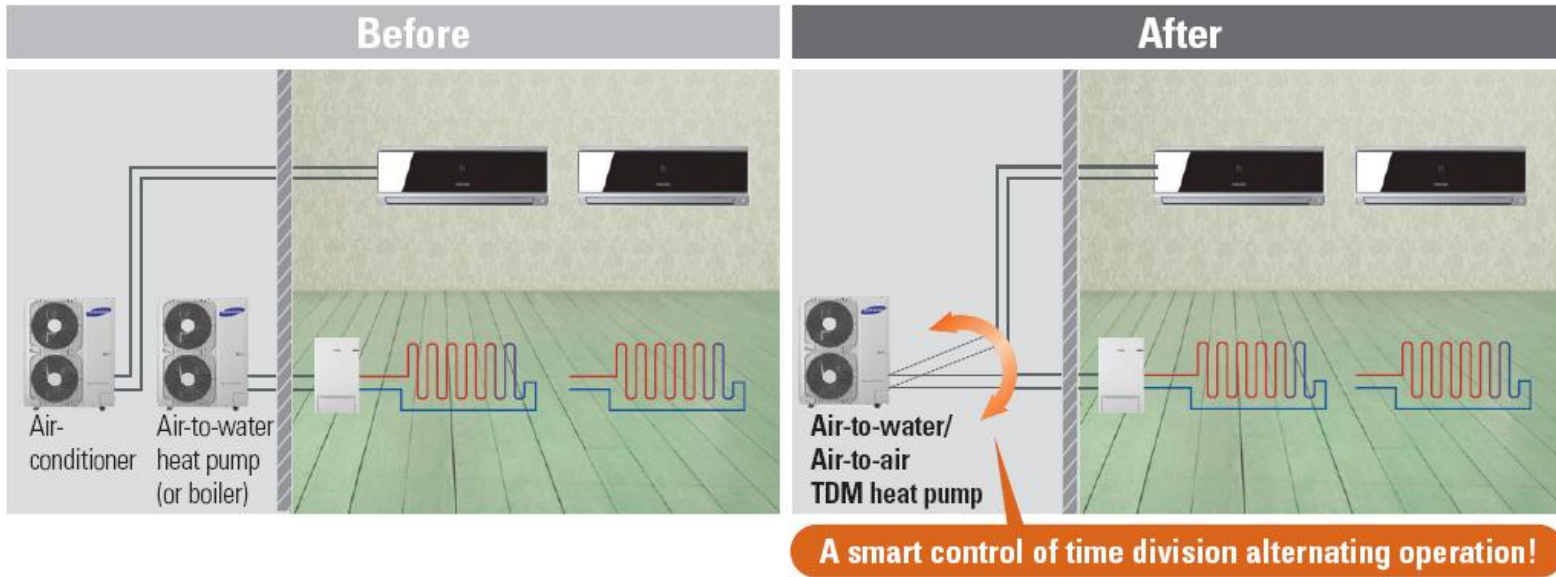


Acts like multi air-conditioners

Acts like a high efficiency boiler


Features

Quick Heating by TDM Technology

Floor heating is well known as the optimal heating option for indoor thermal comfort. However, it takes 4~8 hours to heat up the room after it is turned on. Samsung EHS TDM technology quickens that process by blowing hot air along with floor heating to warm up the room.

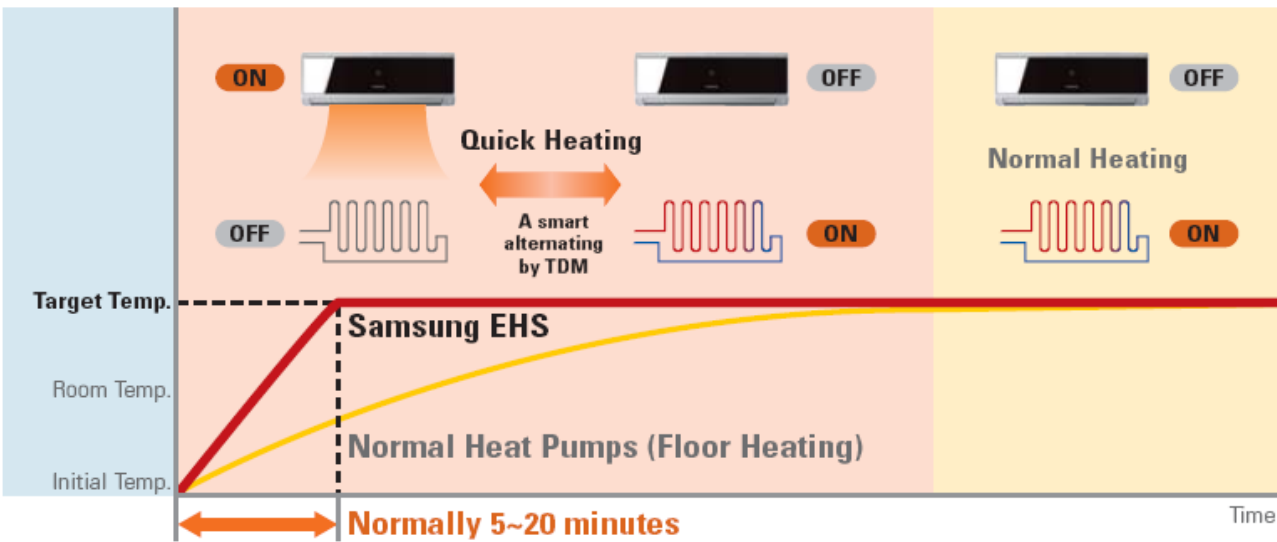

Typical Seasonal Usage

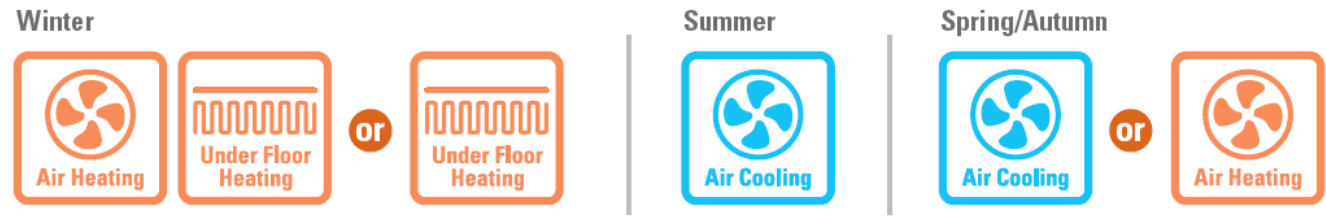

Functions

Air-to-Water
Heat Pump Solution



Air-to-Air
Heat Pump Solution



Under floor heating



Air Heating

Integrated
Indoor Climate Control
in One System



Radiator



Air Cooling




Domestic Hot Water
- Samsung Confidential -

Benefits

Running Costs-Reduction of Up to 33.3%

Samsung EHS, known for its world class efficiency (11kW floor heating system with COP of 4.55), can reduce 33.3% of your running costs as compared to a gas boiler.

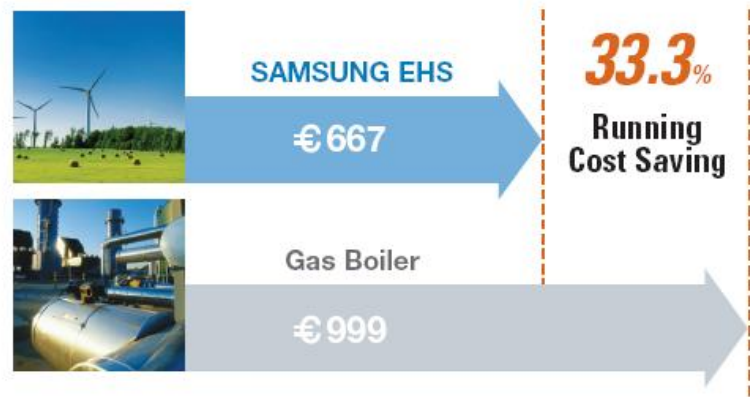

Price and Space Reduction of Up to 50%

With an all-in-one outdoor unit capable of both air-to-water and air-to-air functions, Samsung EHS saves you in terms of the low initial purchase price & installation fee as well as the space needed for an extra outdoor unit.



Benefits

High Performance at Low Temperature

Samsung EHS is made up of an inverter compressor optimally operated according to the outdoor temperature, offering heating performance of 90% at -10°C and reliable anti-freezing protection at -20°C .

**90% di resa
a -10°C**

Remote Controller Gives You Easy and Abundant Options

Smart user interface technology has been woven into Samsung EHS to allow easy and convenient control of the cooling and heating system at home. This control allows one-touch access to energy consumption statistics and other components (Solar Panel, Back-Up Boiler, etc) monitoring.

Providing chances to reduce more energy by letting the customer make some choices in system using patterns!



Simple Stand-by Function at Outing

The system in "stand-by mode" stops all of its functions, except for one function that prevents the pipes from breaking/bursting due to weather changes. Additionally, this system can keep the house at a desired temperature even when you are out.



Real-time Energy Consumption Display

5 Eco-level bar indicator shows the level of energy consumption (Solar Panel, Back-Up Boiler and Back-Up Heater of the hydro unit).



Solar Panel and Back-Up Boiler "Work in Progress" Display

The system indicates when Solar Panel and Back-Up Boiler are in the process of hybrid heating.



Automatic Anti-Freezing Function

When the house is left unattended for an extended period during the winter and the temperature outside goes down, the system automatically runs its heat pump to keep the water-flow above the sub-freezing point.

Specification



Outdoor Unit			RD060PHXEA	RD070PHXEA	RD080PHXEA	RD110PHXEA	RD140PHXEA	RD160PHXEA
Function **1			A2A/A2W Multi	A2A/A2W Multi	A2A/A2W Multi	A2A/A2W Multi	A2A/A2W Multi	A2A/A2W Multi
Hydro Unit Combination			NH080PHXEA	NH080PHXEA	NH080PHXEA	NH160PHXEA	NH160PHXEA	NH160PHXEA
Power Supply		P/V/Hz	1/220~240/50	1/220~240/50	1/220~240/50	1/220~240/50	1/220~240/50	1/220~240/50
Maximum Running Current/Recommended MCCB		A	14/20	16/20	18/20	25/40	28/40	30/40
Nominal Capacity **2)	Heating	kW	6.0	7.0	8.0	11.0	14.0	16.0
	Cooling	kW	6.0	7.0	8.0	11.3	14.2	15.5
Nominal Power Input **2)	Heating	kW	1.3	1.59	1.93	2.42	3.21	3.90
	Cooling	kW	1.54	1.94	2.42	2.90	3.94	4.70
A2W Performance **2)	COP	W/W	4.60	4.40	4.15	4.55	4.36	4.10
	EER	W/W	3.90	3.60	3.30	3.90	3.60	3.30
A2A Performance **2)	COP	W/W	4.04	4.04	4.04	3.94	3.94	3.94
	EER	W/W	3.21	3.21	3.21	3.46	3.46	3.46
Operation Range	Heating	°C	-20~35	-20~35	-20~35	-20~35	-20~35	-20~35
	Cooling	°C	10~46	10~46	10~46	10~46	10~46	10~46
	Domestic Hot Water	°C	-20~43	-20~43	-20~43	-20~43	-20~43	-20~43
Dimension (WxHxD)	Net	mm	798x880x310	798x880x310	798x880x310	932x1,128x375	932x1,128x375	932x1,128x375
Weight	Net	kg	71	71	71	108	108	108
Maximum Number of Indoor units Connected		EA	4	4	4	5	5	5



Hydro Unit			NH080PHXEA	NH160PHXEA
Power Supply		P/V/Hz	1/220~240/50	1/220~240/50
Leaving Water	Heating	°C	20~55	20~55
Temperature Range	Cooling	°C	5~25	5~25
Operation Range		°C	0~32	0~32
Electric Heater		kW	4	6
Pipe Connection	Liquid/Gas	Inch	3/8"/5/8"	3/8"/5/8"
	Water	Inch	BSPP Male 1 1/4"	BSPP Male 1 1/4"
Dimension (WxHxD)	Net	mm	850x510x315	850x510x315
Weight	Net	kg	49	50

Specification



Domestic Hot Water Tank		Standard		Solar Connected	
		NH200WHXEA	NH300WHXEA	NH200WHXES	NH300WHXES
Material		Stainless Steel (A SI 444/DIN 1.4521)		Stainless Steel (A SI 444/DIN 1.4521)	
Water Volume	Liter	198	287	198	287
Electric Capacity	kW	2.6	2.6	2.6	2.6
Heater Power Supply	P/V/Hz	1/ 230/50	1/ 230/50	1/ 230/50	1/ 230/50
Diameter	mm	500	500	500	500
Height	mm	1,230	1,680	1,230	1,680
Pipe Connection (Sanitary Water)	Inch	3/4" FBSP	3/4" FBSP	3/4" FBSP	3/4" FBSP
Maximum Water Temperature	°C	70	70	70	70



Vivace (Shadow Mirror)



Neo Forte

Vivace (Shadow Mirror)				NH022VHXEA	NH028VHXEA	NH036VHXEA	NH056VHXEA	NH071VHXEA	
Neo Forte				NH022NHXEA	NH028NHXEA	NH036NHXEA	NH056NHXEA	NH071NHXEA	
Performance **3)	Capacity	Cooling	kW	2.2	2.8	3.6	5.6	6.8	
		Heating	kW	2.5	3.2	4.0	6.3	7.0	
Set Size	Net Dimensions (WxHxD)			mm	825x285x189	825x285x189	825x285x189	1,065x298x218	1,065x298x218



Slim Duct				NH022LHXEA	NH028LHXEA	NH036LHXEA	NH045LHXEA	NH056LHXEA	
Performance **3)	Capacity	Cooling	kW	2.2	2.8	3.6	4.5	5.6	
		Heating	kW	2.5	3.2	4.0	5.0	6.3	
Set Size	Net Dimensions (WxHxD)			mm	900x199x600	900x199x600	900x199x600	1,100x199x600	1,100x199x600

Notes

*1) All Model Names in the table are based on Air-to-Air/Air-to-Water Multi operation. Air-to-Water Single models are also available.

*2) Measuring Conditions: (Heating) Hot Water In/Out 30°C/35°C, Outdoor Air Dry/Wet Bulb 7°C/6°C; (Cooling) Hot Water In/Out 23°C/18°C, Outdoor Air Dry Bulb 35°C

*3) Measuring Conditions: (Heating) Indoor Air Dry/Wet Bulb 20°C/15°C, Outdoor Air Dry/Wet Bulb 7°C/6°C; (Cooling) Indoor Air Dry/Wet Bulb 27°C/19°C, Outdoor Air Dry/Wet Bulb 35°C/24°C

- A2W: Air-to-Water, A2A: Air-to-Air

- Specifications are subject to change without prior notice for product improvement.